

90504A/B Clear Epoxy Compound

Product Information Sheet

For reference only, not for specification use

DESCRIPTION:

A two-part Clear Epoxy Compound for decorative coating on rigid substrate.

USES:

Designed for decorative coating on sound substrate. It also serves as adhesive to bond metal, wood, ceramics & glasses.

ADVANTAGES:

- High transparency
- High hardness, can be grinded or burnished
- Able to enlarge the coated figure, doming
- Excellent chemical resistant
- Coated items can be further processed by plating or ultrasonic cleaning
- Low shrinkage

PACKAGING:

Packaged in kits as pre-proportioned batches for error-free mixing and application.

SURFACE PREPARATION:

In general, the surface to be bonded must be clean, sound, dry and above 10°C to assure an optimum bonding. All surface contaminants must first be thoroughly removed by chemical and/or mechanical means.

PHYSICAL PROPERTIES:

Mixing ratio (by weight,): A : B = 100 : 50

	90504 A/B
Viscosity , Brookfield RVT: Spindle 3, Speed 10 cps	
i) Part A	~4,500
ii) Part B	~ 100
Viscosity (after mixing) , Brookfield RVT Spindle 3, Speed 10 cps	~500
Gel Time (200g), minutes	~65
Highest Exotherm Temperature (°C)	~191
Time for reaching the Highest Exotherm Temperature, minutes	~72
Hardness after curing (Shore D)	~85

* All measurements taken @25°C unless otherwise noted.

For Industrial Use Only

KEEP OUT OF THE REACH OF CHILDREN.

APPLICATION:

1. By dispenser, dispensing system
2. Weight accurately; any variation in mix ratio will result in degraded properties
3. Use only in ventilated area
4. Use fume mask and gloves
5. Avoid skin contact (Part B is CORROSIVE!)
6. Part B is heat & moisture sensitive. Leaving the can open during long application will lead to yellowing of the coating and decrease in shelf life.

Caution: Avoid large mass., severe exotherm may occur!!

7. Because of the high purity, crystallization may occur if the storage temperature is < 20 °C. Customer can heat the Part A with an oven, until the Part A appears complete transparent. This method will not produce any effect to the properties of the material. Completely cool down the material before mixing.

Suggested Temperature & Time

Weight	Oven Temperature	Time
1 kg	60 °C – 80 °C	1 – 2 hr
10 kg	60 °C – 80 °C	3 – 4 hr

CURE TIMES:

Curing Time	90504 A/B
Set-to-touch @ 25 °C (<i>thickness: 0.15mm</i>)	> 7.6 hr
Surface Dry @ 25 °C	> 9.9 hr
Full Cure @ 25 °C	> 13.6 hr
Full Cure in Oven @ 80 °C	35 minutes

CLEAN UP:

Tools should be cleaned immediately after use with soap and water. Solvents such as Xylol or paint thinner can also be used. But care should be taken before using any flammable & hazardous solvents.

DISPOSAL:

Dispose in accordance with local regulations. Use licensed hazardous waste company. Empty containers may contain product residue, including flammable or explosive vapor. Do not cut, puncture or weld on or near container. All label warnings must be observed until the container has been properly disposed of.

Storage:


- Part B is heat & moisture sensitive, store in a cool, dry place.
- Mixed materials cannot be stored for future use.
- Shelf life would be shortened if the container had ever been opened.
- Shelf Life (fulfilling above requirements): approximate 1 year

WARRANTY STATEMENT Information about Chematco products is given to the best of our knowledge, based on tests and experience. However, as products are often applied or used under conditions beyond our control, Chematco cannot guarantee anything but the quality of the products. Chematco warrants its products meet specifications set by Chematco, but we reserve the right to change given specifications without notice. CHEMATCO DISCLAIMS ALL OTHER WARRANTIES RELATING TO THE PRODUCTS AND THEIR APPLICATION, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Use of Chematco products constitutes acceptance of the terms of this limited warranty and the terms and conditions set out in our invoice, contract and quotation, contrary provisions of buyer purchase documents notwithstanding. In the event Chematco finds that the product delivered is off specification, Chematco will, at its sole discretion, either replace the product or refund the purchase price thereof, and Chematco's choice of remedy is buyer's sole remedy. Chematco will under no circumstances be liable for special, incidental or consequential damages.

Mixing & Storage of Epoxy

Mix the materials according to the mixing ratio (by weight)



After mixing, curing process will be started.
Calculate the ideal mixing amount according to the designated pot life. ^{P.S.2.}



Empty Part B entirely into the can of Part A

Manual Mixing

Electrical Mixing

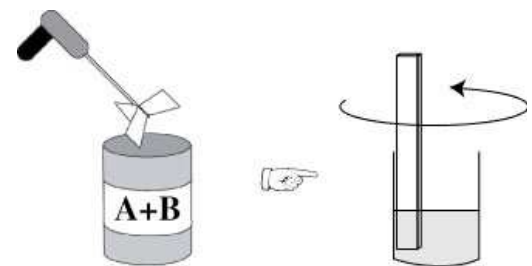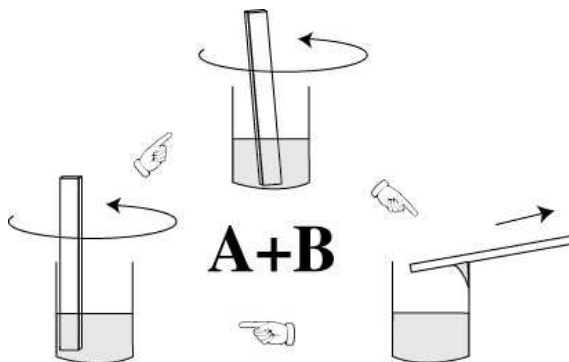


- * Perpendicularly stir with a paint paddle
- * Mix the material thoroughly, including the sediment and material sticking on inner of the can. Repeat thrice
- * Mixing for 2-3 minutes until completely blended

- * Stir with a Jiffy Mixer
- * Scrape the material sticking on the can's inner into the mixed component
- Repeat mixing

- P.S.:**
1. Avoiding produce bubbles during mixing. Bubbles can be reduced by vacuumizing.
 2. Pls. refer to the relevant technical data sheet for particular product's pot life.

Storage

- * Unmixed materials should be gastightly stored



Safety

- * Use only in ventilated area
- * Use fume mask and gloves
- * Wear goggles
- * Use within the pot life or the mixed component will produce severe exotherm

